


# Pneumatic Starters A27LP



5127LP-CA\_en

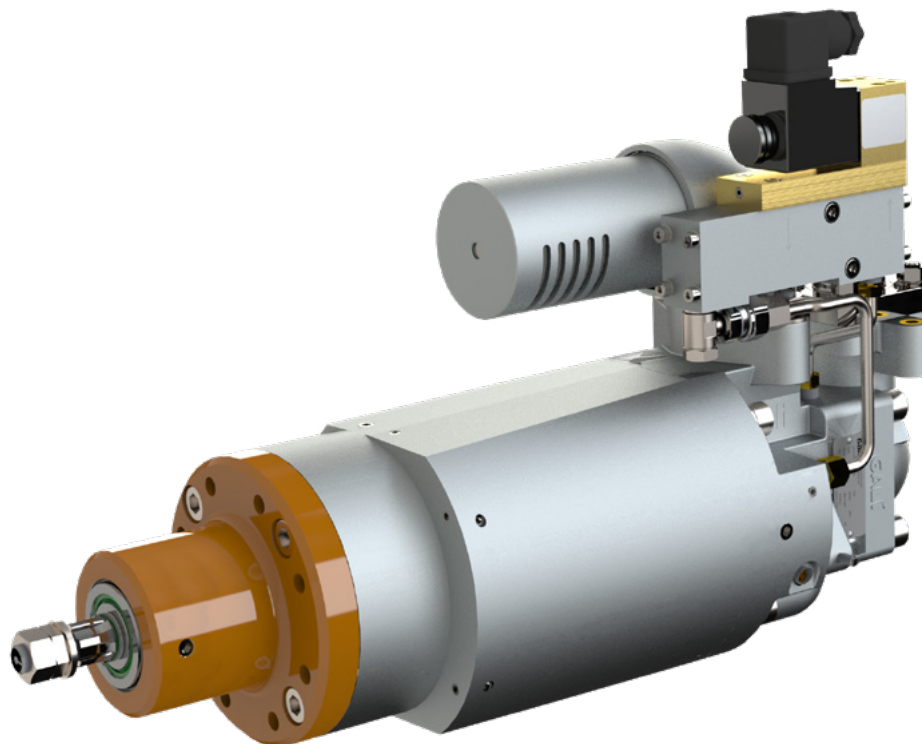

The new model A27LP air starter is intended to start diesel or gas engines of an approximate power range of 220-1100 kW (300-1475 HP), although its suitability depends on the engine displacement and the ratio between the engine's ring gear and starter's pinion.

The A27LP model is a pre-engaged type starter with start overrun safety integrated and lubrication-free. This new model provides the well known advantages of Gali starters due to its reliability in the harshest environments and its high starting torque.

The A27LP type is designed to work at low air pressure installations maintaining the traditional Gali's rotors technology.

They are ideal for new installations as well as to easily retrofit existing installations with problematic vane and turbine starters. The A27LP starters are available for clockwise and counterclockwise rotation and are successfully used in **Generating Sets, Motor-Pump Sets, Marine Propulsion & Auxiliary Engines, Industrial Engines, Locomotives, Forklift Truck Engines, Bulldozers, Offshore-Sea Platform, Nuclear & Power Plants, Mines.**

## TECHNICAL DATA A27LP

Maximum Working Pressure	10 bar
Maximum Power	10.5 kW (10 bar)
Speed at maximum Power	1250 min <sup>-1</sup>
Maximum Torque	165 Nm (10 bar)
Minimum diameter of air feed pipework	30 mm (13/16 in )

